


PLW-200 E+ PILOT LINE WINDER

2,000 LBS. FOUR DRUM ELECTRIC PILOT LINE WINDER

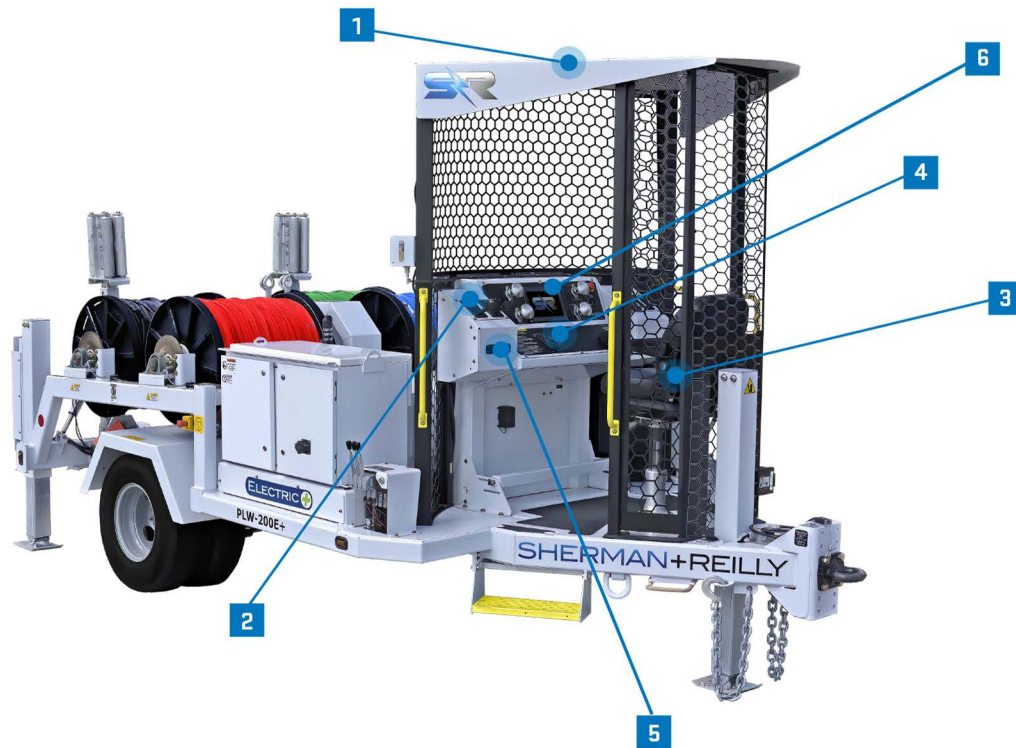

- 1** Patent Pending Safe-Zone® enclosure with Ocu-View™.
- 2** Remote Reel Engagement.
- 3** Ergonomic Control Panel with Adjustable Seat.
- 4** Synchronized Levelwind Control.
- 5** Light Bar, USB and 12V Charging.
- 6** 10" Touchscreen Incorporates How-To Videos & Operator's Manual.

FEATURES

- 2,000 lbs. Top of Drum Pulling Capacity.
- All-Electric Drivetrain.
- Automatic Battery Management.
- S+R Telematics™ provides real time support.
- Supports the installation of 4 conductors simultaneously.
- Independent roller assemblies designed for each of the four pilot lines.
- Single Drum Capacity: 6,000 ft. of 7/16 in. Rope.

SPECIFICATIONS

Maximum Pulling Capacity:	2,000 lbs., rated at the top of drum
Max. Line Speed:	4.0 mph. top of drum
Reel Capacity:	6,000 ft. of 7/16 in. PE-12 synthetic rope
Drive System:	48 V Electric
Charging Time Standard Battery Size:	Rapid Recharge: 50% to 100% = ~1 hour; 0 to 100% = ~2 hours Wall Charger: Level 1 (120V): 4-5 hr for 0% to 50%; 8-9 hr for 0% to 100% Level 2 (240V): 2-3 hr for 0% to 50%; 4-5 hr for 0% to 100%
Rapid Recharge System:	Diesel, Flywheel-Integrated Permanent Magnet Generator, 100A Field Charging
Wall Charger Plug Type:	J1772 Plug
Hydraulic Fluid:	ISO Grade 32
Hydraulic Reservoir:	4 Gallons
Payout Brake:	Manually controlled disc brakes, 12" diameter disc, bronze
Levelwind:	Electric, joystick controlled (2)
Operator's Safety Enclosure:	Safe-Zone® with OcuView open-air enclosure
Frame Construction:	Steel tubing, continuous weld
Length (overall, nom.):	207 in. (17 ft. 3 in.)
Width (overall, nom.):	102 in.
Height (overall, nom.):	117 in.
Weight (w/ rope):	nominal 11,100 lbs.
GVWR:	12,000 lbs.
Suspension:	Leaf spring
Axle Configuration:	Single
Wheel Configuration and Tires:	Dual 235/85R 16LRG; 8-6.5
Brakes (Trailer):	Electric, with safety break-away switch and dedicated battery
Towing Attachment:	3 in. pintle eye, with two safety chains and hooks
Tie Downs (4):	5/8 in. dia. steel D-rings
Bumper (R/L) Jacks:	Hydraulic with galvanized shoe (2)
Front/Nose Jack:	Hydraulic with galvanized shoe (1)
Electrical System:	48/12 VDC
Lights/Navigation:	12 V LED, US DOT
Grounding (2):	Two (2) grounding studs
Wheel Chocks and Holders:	Standard
Fire Extinguisher:	ABC
Drum Covers:	Vinyl
Color:	S+R white

OPTIONS

Tongue Extension
Solar Charger
Galvanized Finish
Drum Covers
Additional Battery Size Options: 15.375 kWh 20.5 kWh
Air Brakes
J1772 Plug Adapters Available

The PLW-200 E+ delivers all-electric operation with The Onboard Rapid Recharge System by S+R™, providing superior performance and automatic battery management so the operator can focus on the job at hand. With all the capabilities of our standard PLW-200H, the E+ has an all electric drivetrain designed to exceed all-day use. The On-Board Rapid Recharge System responds automatically, without input from the operator, until the work is done no matter how tough the job gets. In addition, S+R Telematics™ comes standard at no cost, providing industry leading support in real time. The E+ Series of products continues Sherman + Reilly's commitment to transform customer expectations for jobsite safety and equipment performance

**For More
Information & Demos
Please Contact**



BC Office
17949 Roan Place
Surrey, B.C. V3S 5K1
Phone: 604-594-2701
Email: sales@linestar.ca

Alberta Office
14, 6325 - 11 Street SE
Calgary, AB, T2H 2L6
Phone: 403-243-1900
Email: salesab@linestar.ca

Prairies Office
1103 Keewatin Street
Winnipeg, MB, R2X 2Z3
Phone: 204-783-9771
Email: salesmbsk@linestar.ca

Ontario Office
Unit #1 - 171 Ambassador Dr.
Mississauga, ON, L5T 2J1
Phone: 905-564-5344
Email: saleson@linestar.ca

Québec Office
1331 Rue Natuinale
Terrebonne, QC, J6W 6H8
Phone: 438-239-9993
Email: ventesqc@linestar.ca

Atlantic Canada Office
714 Malenfant Blvd
Dieppe, NB, E1A 5V8
Phone: 506-533-0476
Email: karl@linestar.ca