



FLIR *EX Series*

Point-and-Shoot Thermal Imaging Cameras

FLIR E4, E5, E6, and E8 infrared cameras are powerful and extremely cost-effective, easy-to-use troubleshooting tools for building, electrical, and mechanical applications. Four resolution options are available (ranging from 80 x 60 IR pixels to 320 x 240) to fit the target size, working distance, and detail you require. All include MSX® technology that provides extraordinary thermal imaging detail. Wi-Fi connectivity to smartphones and tablets via the FLIR Tools Mobile app makes sharing images and sending reports from any location easier, enabling you to make critical decisions faster. By providing thermal images to help you find hidden problems along with accurate temperature measurements, an Ex-Series camera is the ideal budget-friendly replacement for old-school IR thermometers.

Easy to use

Intuitive, user-friendly interface for measurements in thermal or MSX mode

- Fully automatic and focus-free
- Simple button navigation to on-screen settings, imaging modes, and measurement tools
- MSX adds digital camera detail to IR images for better perspective and interpretation

Conveniently share images and findings


Download images, create reports, and show what you've found instantly

- Wi-Fi connectivity to mobile devices via FLIR Tools Mobile app
- Rapid Wi-Fi or USB image transfer for documentation
- Analyze and edit images, and create convincing reports with FLIR Tools


Compact and rugged

Built for portability and use in harsh environments

- Lightweight (1.2 lb / 0.575kg) and withstands 2-meter drop test
- Accessory belt pouch included for convenience on-the-go
- 2-year warranty coverage on camera, 5 years on batteries, 10 years on detector

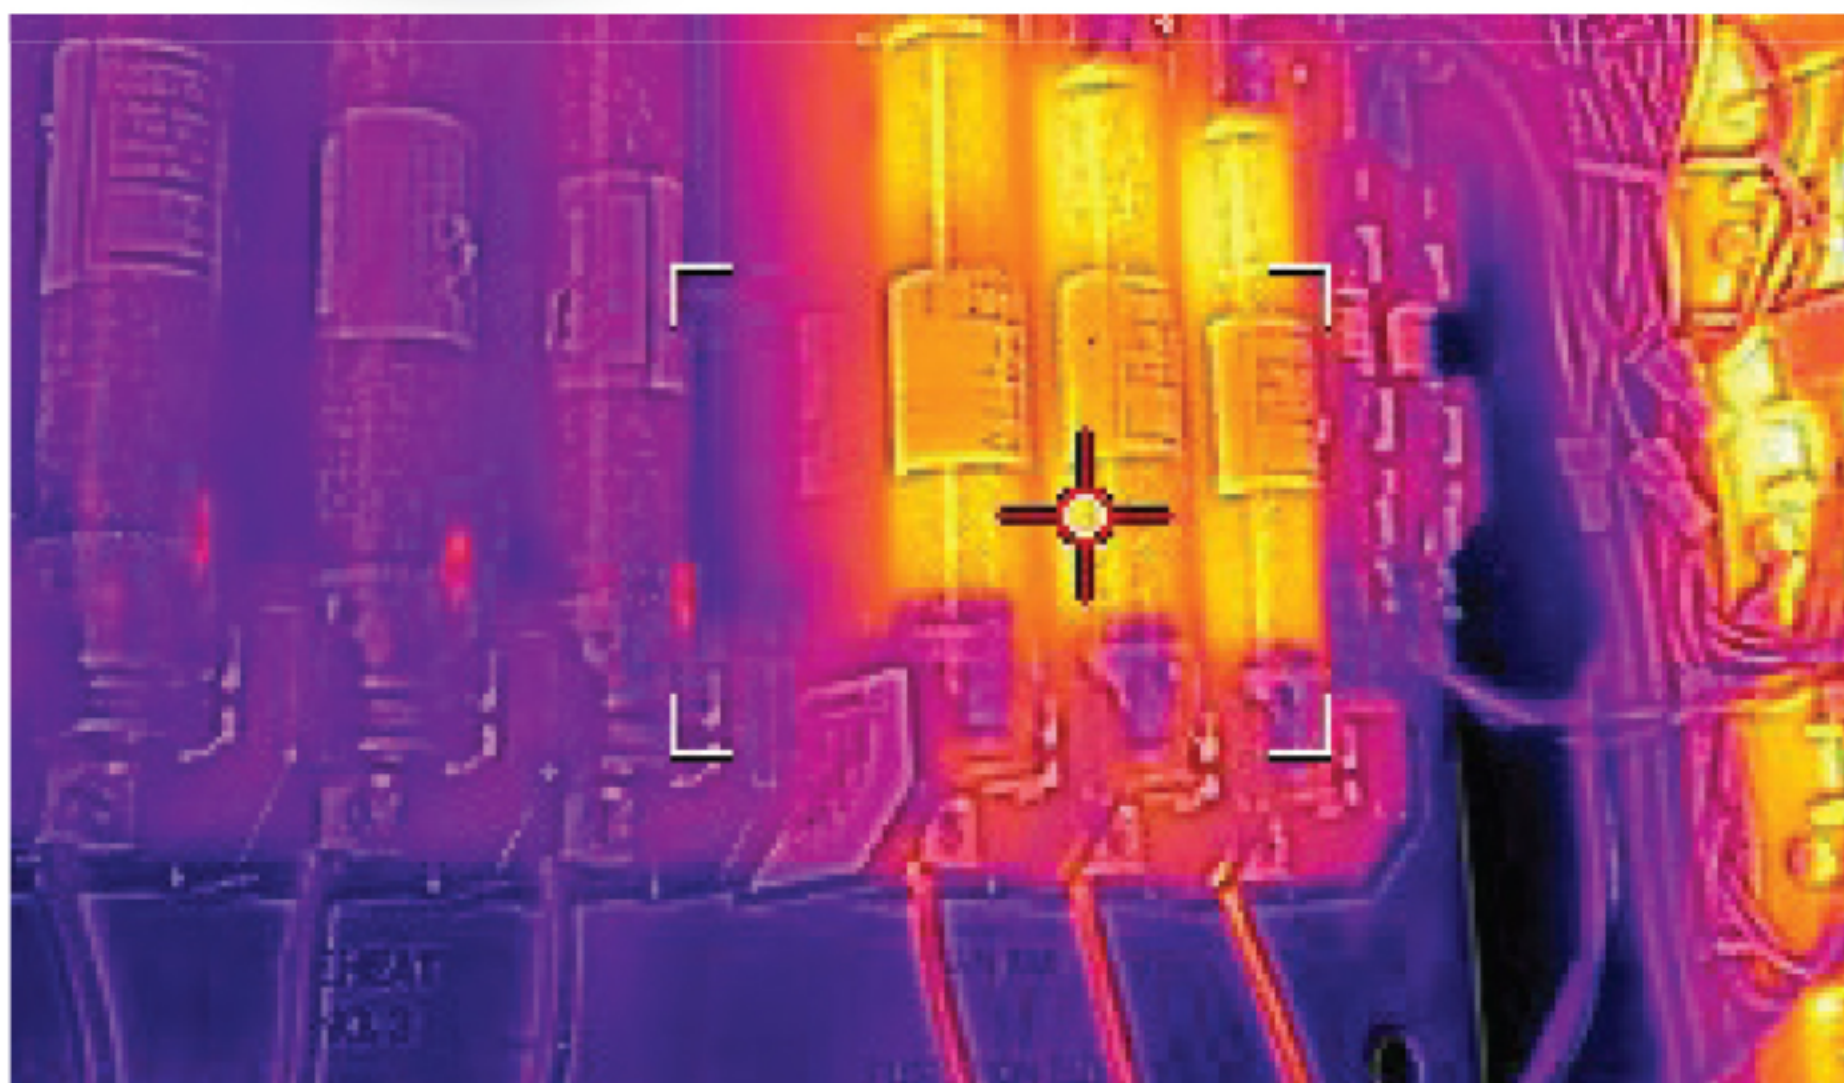

MSX shows you numbers, labels and structural features, eliminating the need to look at a visual image for detail

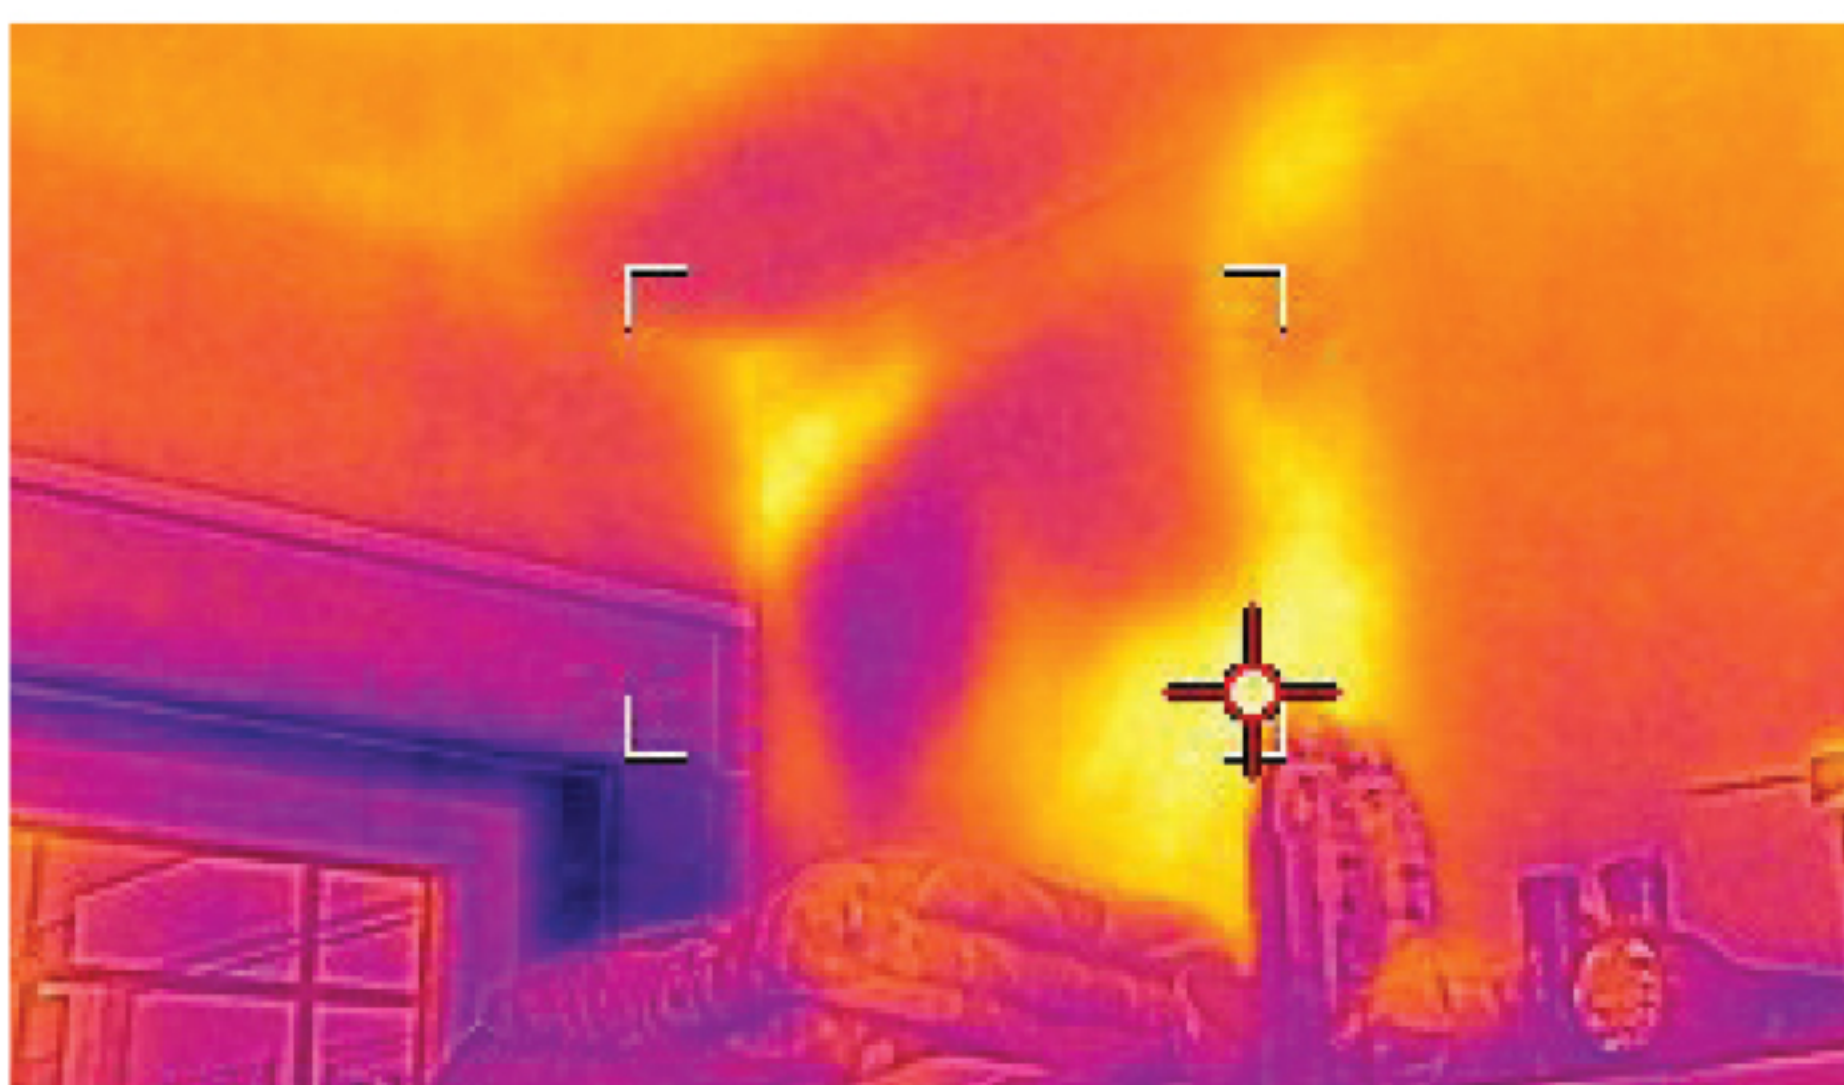

See temperature patterns showing insulation voids and other building issues

Specifications

| Features by Camera | E4 | E5 | E6 | E8 |
|--------------------------------------|---|----------------------------|---------------------------|------------------|
| IR resolution | 80 × 60 pixels | 120 × 90 pixels | 160 × 120 pixels | 320 × 240 pixels |
| Thermal sensitivity/NETD | <0.15°C (0.27°F) / <150 mK | <0.10°C (0.27°F) / <100 mK | <0.06°C (0.11°F) / <60 mK | |
| Image adjustment | Automatic adjust/lock image | | Automatic/Manual | |
| Common Features | | | | |
| Field of view (FOV) | 45° × 34° | | | |
| Minimum focus distance | 0.5 m (1.6 ft.) | | | |
| Image frequency | 9 Hz | | | |
| Focus | Focus free | | | |
| Wi-Fi | Peer-to-peer or network | | | |
| Detector type | Uncooled microbolometer | | | |
| Image Presentation and Modes | | | | |
| Display | 3.0 in. 320 × 240 color LCD | | | |
| Image modes | Thermal MSX®, thermal, picture-in-picture, thermal blending, digital camera | | | |
| Multi Spectral Dynamic Imaging (MSX) | IR image enhanced with visible camera detail | | | |
| Picture in Picture | IR area on visual image | | | |
| Color palettes | Black & white, iron, and rainbow | | | |
| Digital camera resolution/FOV | 640 × 480/55° × 43° | | | |
| Measurement Features | | | | |
| Object temperature range | −20°C to +250°C (−4°F to +482°F) | | | |
| Accuracy | ±2°C (±3.6°F) or ±2% of reading, for ambient temperature 10°C to 35°C (+50°F to 95°F) and object temperature above +0°C (+32°F) | | | |
| Spotmeter; area | Center spot; box with min./max. | | | |
| Emissivity table/correction | Emissivity table of predefined materials/variable from 0.1 to 1.0 | | | |
| Additional Data | | | | |
| File formats | Standard JPEG, 14-bit measurement data included | | | |
| Interfaces | USB Micro: Data transfer to and from PC and Mac device | | | |
| Battery type & operating time | Rechargeable 3.6 V Li ion battery; approx. 4 hours typical use | | | |
| Encapsulation/drop | IP 54 (IEC 60529)/2m (6.6 ft.) | | | |
| Camera weight,incl. battery | 0.575 kg (1.27 lb.) | | | |

Specifications are subject to change without notice. For the most up-to-date specifications, go to www.flir.com



Download images fast via USB



Wireless Connectivity to Smartphones, Tablets and more.



PORTLAND
Corporate Headquarters
FLIR Systems, Inc.
27700 SW Parkway Ave.
Wilsonville, OR 97070
PH: +1 866.477.3687

NASHUA
FLIR Systems, Inc.
9 Townsend West
Nashua, NH 03063
PH: +1 866.477.3687

CANADA
FLIR Systems, Ltd.
920 Sheldon Court
Burlington, ON L7L 5K6
Canada
PH: +1 800.613.0507

LATIN AMERICA
FLIR Systems Brasil
Av. Antonio Bardella,
320 Sorocaba,
SP 18085-852
Brasil
PH: +55 15 3238 7080

CHINA
FLIR Systems Co., Ltd
Rm 1613-16, Tower II
Grand Central Plaza 1
38 Shatin Rural
Committee Rd.
Shatin, New Territories
Hong Kong
PH: +852 2792 8955

BELGIUM
FLIR Systems
Luxemburgstraat 2
2321 Meer
Belgium
PH: +32 (0) 3665 5100

UNITED KINGDOM
FLIR Systems UK
2 Kings Hill Ave., Kings Hill
West Malling, Kent
ME19 4AQ
United Kingdom
PH +44 (0)1732 220 011

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited. Imagery for illustration purposes only. Specifications are subject to change without notice. ©2017 FLIR Systems, Inc. All rights reserved. [Updated Jan 24] 17-0072

www.flir.com
NASDAQ: FLIR